



Professional Laundry Equipment LamaLux

Engineered to meet the highest global standards



Washing and Drying Machines for Laundries and Dry Cleaners

More than just washing – also wet cleaning

Up to 100 Customizable Programs



UV disinfection

Eliminates Viruses and Germs



Quality guarantee

After assembly, each machine undergoes load testing for 48 hours



Reliability

Equipment Lifespan – 35,000 Cycles



Vending solutions

Suitable for Self-Service Laundries



Get the Best of Convenience and Cost Savings

Experience and expertise

Experts with 15 years of experience will help you choose equipment tailored to your needs



Spare parts warehouse

Essential spare parts always in stock



Installation and launch

Assistance with equipment installation and commissioning



Level of service

Support team is available 24/7



Great balance of price and performance

Compared to similar equipment from other brands



Delivery and guarantee

Warehouse dispatch within 24 hours

After receiving the prepayment



Custom orders delivered within 3 to 4 months

If unavailable in the warehouse




3-year warranty

We provide warranty and after-warranty support



Equipment Catalog

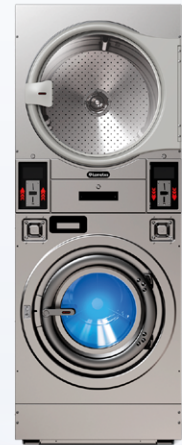

Washing Machine

Soft mount washer

LX13-W LX22-W
LX16-W LX27-W

Washing Machine

Hard mount washer

LX13-WH LX22-WH
LX16-WH LX27-WH

Single tumble dryer

LX13-DS LX19-DS LX27-DS
LX16-DS LX22-DS LX33-DS

Stack tumble dryer

LX13-DD LX19-DD
LX16-DD LX22-DD LX27-DD

Stack washer dryer

Soft mount washer

LX13-WD LX22-WD
LX16-WD LX27-WD

Stack washer dryer

Hard mount washer

LX13-WDH LX19-WDH
LX16-WDH LX22-WDH LX27-WDH

Washing Machine

Soft mount washer

Benefits



Touch Screen

For ease of machine operation



Comfortable loading and unloading

The door opens to 180 degrees



Stainless Steel

Housing, drum, top, front, and side panels



Spin speed up to 1000 RPM

G-Force up to 400



Key components from leading global manufacturers

Delta inverter, NSK bearings, Depend-O drain valve



UV Disinfection

Eliminates Viruses and Germs



Technical Specifications

Model

LX13-W

LX16-W

LX22-W

LX27-W



Drum

Loading capacity, kg	13	16	22	27
Volume, L	116	148	194	237
Diameter, mm	635	635	740	740
Depth, mm	365	465	450	550

Speed

Washing speed, rpm	32	32	32	32
Mid spinning speed, rpm	420	420	420	420
High spinning speed, rpm	1000	1000	900	900
G-Force	363	363	343	343

Power

Motor, kw	2,2	2,2	3,0	3,7
Heating, kw	2*4	3*4	4*4	5*4
Total, kw	10,2	14,2	19	23,7

Connections

Water inlet, inch	3/4	3/4	3/4	3/4
Drain diameter, mm	76	76	76	76

Net dimensions

W*D*H, mm	839*964*1360	839*1064*1360	939*1091*1497	939*1192*1497
Net weight, kg	349	396	582	663

Plywood box dimensions

W*D*H, mm	959*1084*1510	959*1184*1510	1059*1211*1647	1059*1312*1647
Gross weight, kg	414	461	647	728

Heating way

Steam, Electricity, Hot water

Washing Machine

Hard mount washer

Benefits



Touch Screen

For ease of machine operation



Comfortable loading and unloading

The door opens to 180 degrees



Stainless Steel

Housing, drum, top, front, and side panels



Spin speed up to 750 RPM

G-Force 200



Key components from leading global manufacturers

Delta inverter, NSK bearings, Depend-O drain valve



UV Disinfection

Eliminates Viruses and Germs



Technical Specifications

Model

LX13-WH

LX16-WH

LX22-WH

LX27-WH



Drum

Loading capacity, kg	13	16	22	27
Volume, L	116	148	194	237
Diameter, mm	635	635	740	740
Depth, mm	365	465	450	550

Speed

Washing speed, rpm	32	32	32	32
High spinning speed, rpm	750	750	700	700
G-Force	204	204	207	207

Power

Motor, kw	1,5	2,2	2,2	3,0
Heating, kw	2*4	3*4	4*4	5*4
Total, kw	9,5	14,2	18,2	23

Connections

Water inlet, inch	3/4	3/4	3/4	3/4
Drain diameter, mm	76	76	76	76

Net dimensions

W*D*H, mm	803*923*1287	803*1031*1287	907*1024*1387	907*1124*1387
Net weight, kg	257	272	286	404

Plywood box dimensions

W*D*H, mm	923*1043*1437	923*1151*1437	1027*1144*1537	1027*1244*1537
Gross weight, kg	297	312	326	444

Heating way

Steam, Electricity, Hot water

Single tumble dryer

Benefits



Touch Screen

For ease of machine operation



Comfortable loading and unloading

The door opens to 180 degrees



Stainless Steel

Housing, drum, top, front, and side panels



Electric or gas heating

Options are available



High Drying Speed

Cycle from 10 minutes



Drum with reverse function

In the standard configuration



Dust and lint filter

Spacious and convenient



Operational Safety

Sensors with emergency shut-off system



Technical Specifications

Model

LX13-DS

LX16-DS

LX19-DS

LX22-DS

LX27-DS

LX33-DS



Drum

Loading capacity, kg	13	16	19	22	27	33
Volume, L	229	286	358	379	477	560
Diameter, mm	745	745	745	855	855	900
Depth, mm	525	655	820	660	830	880

Power

Main motor, kw	0,25	0,25	0,25	0,55	0,55	0,55
Fan motor, kw	0,37	0,37	0,37	0,75	0,75	0,75
Heating, kw	10,5	10,5	13,5	14,4	19,8	25,2
Total, kw	11,12	11,12	14,12	15,7	21,1	26,5

Energy consumption

Gas consumption, kg/H	0,6	0,8	0,9	1	1,3	1,5
Gas inlet, inch	1/2	1/2	1/2	1/2	1/2	1/2
CFM, Btu/H(kw)	55 000(16,2)	75 000(21,98)	90 000(26,38)	95 000(27,84)	115 000(33,7)	135 000(39,56)

Ventilation

Exhaust pipe, mm	190	190	190	190	190	190
Air flow	800	800	900	1000	1000	1100

Net dimensions

W*D*H, mm	800*991*1675	800*1121*1675	800*1286*1675	910*1124*1784	910*1294*1784	943*1336*1799
Net weight, kg	182	190	210	223	251	273

Plywood box dimensions

W*D*H, mm	920*1111*1825	920*1241*1825	920*1406*1825	1030*1244*1934	1030*1414*1934	1063*1456*1949
Gross weight, kg	222	230	250	263	291	313

Heating way

Electricity, gas

Stack tumble dryer

Benefits



Touch Screen

For ease of machine operation



Comfortable loading and unloading

The door opens to 180 degrees



Stainless Steel

Housing, drum, top, front, and side panels



Electric or gas heating

Options are available



High Drying Speed

Cycle from 10 minutes



Drum with reverse function

In the standard configuration



Dust and lint filter

Spacious and convenient



Operational Safety

Sensors with emergency shut-off system



Technical Specifications

Model

LX13-DD

LX16-DD

LX19-DD

LX22-DD

LX27-DD



Drum

Loading capacity, kg	13*2	16*2	19*2	22*2	27*2
Volume, L	229*2	286*2	358*2	379*2	477*2
Diameter, mm	745	745	745	855	855
Depth, mm	525	655	820	660	830

Power

Main motor, kw	0,25*2	0,25*2	0,25*2	0,55*2	0,55*2
Fan motor, kw	0,37*2	0,37*2	0,37*2	0,75*2	0,75*2
Heating, kw	10,5*2	10,5*2	13,5*2	14,4*2	19,8*2
Total, kw	22,24	22,24	28,24	31,4	42,2

Energy consumption

Gas consumption, kg/H	0,6*2	0,8*2	0,9*2	1*2	1,3*2
Gas inlet, inch	1/2	1/2	1/2	1/2	1/2
CFM, Btu/H(kw)	55 000*2(16,2*2)	75 000*2(21,98*2)	90 000*2(26,38*2)	95 000*2(27,84*2)	115 000*2(33,7*2)

Ventilation

Exhaust pipe, mm	190*2	190*2	190*2	190*2	190*2
Air flow	800*2	800*2	900*2	1000*2	1000*2

Net dimensions

W*D*H, mm	800*1031*2005	800*1161*2005	800*1326*2005	800*1208*2225	910*1378*2225
Net weight, kg	298	317	356	380	395

Plywood box dimensions

W*D*H, mm	920*1151*2155	920*1281*2155	920*1446*2155	1030*1328*2375	1030*1498*2375
Gross weight, kg	338	357	396	420	435

Heating way

Electricity, gas

Stack washer dryer

Soft mount washer

Benefits



Comfortable loading and unloading

The door opens to 180 degrees



Electric or gas heating

Options are available



Operational Safety

Sensors with emergency shut-off system



High Drying Speed

Cycle from 10 minutes



UV Disinfection

Eliminates Viruses and Germs



Drum with reverse function

In the standard configuration



Spin speed up to 1000 RPM

G-Force up to 400



Key components from leading global manufacturers

Delta inverter, NSK bearings, Depend-O drain valve







Stainless Steel

Housing, drum, top, front, and side panels



Technical Specifications

Model	LX13-WD	LX16-WD	LX22-WD	LX27-WD
				
Washer / Dryer Drum				
Loading capacity, kg	13	16	22	27
Volume, L	116/229	148/286	194/379	237/477
Diameter, mm	635/745	635/745	740/855	740/855
Depth, mm	365/525	465/655	450/660	550/830
Washer / Dryer Speed				
Washing speed, rpm	32	32	32	32
Tumbler speed, rpm	32	32	32	32
High spinning speed, rpm	1000	1000	900	900
G-Force	363	363	343	343
Power				
Washer motor, kw	2,2	2,2	3,0	3,7
Washer heating, kw	2*4	3*4	4*4	5*4
Dryer motor, kw	0,25	0,25	0,55	0,55
Dryer fan motor, kw	0,37	0,37	0,75	0,75
Dryer heating, kw	10,5	10,5	14,4	19,8
Total, kw	21,32	25,32	34,7	44,8
Washer's Connections				
Water inlet, inch	3/4	3/4	3/4	3/4
Drain diameter, mm	76	76	76	76
Dryer Ventilation				
Exhaust pipe, mm	190	190	190	190
Air flow, m ³ /h	800	800	1000	1000
Energy Consumption of the Drying Machine				
Gas consumption, kg/H	0,6	0,8	1	1,3
Gas inlet, inch	1/2	1/2	1/2	1/2
CFM, Btu/H(kw)	55 000(16,2)	75 000(21,98)	95 000(27,84)	115 000(33,7)
Net dimensions				
W*D*H, mm	860*1049*2165	860*1179*2165	910*1242*2315	910*1405*2315
Net weight, kg	526	589	750	910
Plywood box dimensions				
W*D*H, mm	980*1169*2315	980*1299*2315	1030*1362*2465	1030*1525*2465
Gross weight, kg	591	654	815	975
Heating way				
Washing machine	Steam, Electricity, Hot water			
Drying machine	Electricity, gas			

Stack washer dryer

Hard mount washer

Benefits



Comfortable loading and unloading

The door opens to 180 degrees



Electric or gas heating

Options are available



Operational Safety

Sensors with emergency shut-off system



High Drying Speed

Cycle from 10 minutes



UV Disinfection

Eliminates Viruses and Germs



Drum with reverse function

In the standard configuration



Spin speed up to 750 RPM

G-Force 200



Key components from leading global manufacturers

Delta inverter, NSK bearings, Depend-O drain valve








Stainless Steel

Housing, drum, top, front, and side panels



Technical Specifications

Model	LX13-WDH	LX16-WDH	LX19-WDH	LX22-WDH	LX27-WDH
					
Washer / Dryer Drum					
Loading capacity, kg	13	16	19	22	27
Volume, L	116/229	148/286	179/358	194/379	237/477
Diameter, mm	635/745	635/745	650/745	740/855	740/855
Depth, mm	365/525	465/655	540/820	450/660	550/830
Washer / Dryer Speed					
Washing speed, rpm	32	32	32	32	32
Tumbler speed, rpm	32	32	32	32	32
High spinning speed, rpm	750	750	700	700	700
G-Force	204	204	204	207	207
Power					
Washer motor, kw	1,5	2,2	2,2	2,2	3,0
Washer heating, kw	2*4	3*4	3*4	4*4	5*4
Dryer motor, kw	0,25	0,25	0,25	0,55	0,55
Dryer fan motor, kw	0,37	0,37	0,37	0,75	0,75
Dryer heating, kw	10,5	10,5	13,5	14,4	19,8
Total, kw	20,62	25,32	28,32	33,9	44,1
Washer's Connections					
Water inlet, inch	3/4	3/4	3/4	3/4	3/4
Drain diameter, mm	76	76	76	76	76
Dryer Ventilation					
Exhaust pipe, mm	190	190	190	190	190
Air flow, m ³ /h	800	800	900	1000	1000
Energy Consumption of the Drying Machine					
Gas consumption, kg/H	0,6	0,8	0,9	1	1,3
Gas inlet, inch	1/2	1/2	1/2	1/2	1/2
CFM, Btu/H(kw)	55 000(16,2)	75 000(21,98)	90 000 (26,38)	95 000(27,84)	115 000(33,7)
Net dimensions					
W*D*H, mm	800*1055*2122	800*1194*2122	800*1358*2122	910*1238*2315	910*1411*2315
Net weight, kg	431	461	559	595	629
Plywood box dimensions					
W*D*H, mm	920*1175*2272	920*1314*2272	920*1478*2272	1030*1358*2465	1030*1531*2465
Gross weight, kg	471	501	599	635	669
Heating way					
Washing machine	Steam, Electricity, Hot water				
Drying machine	Electricity, gas				

Subscription-Based Liquid Detergent Dispensing System

Exclusive Terms for LamaLux Equipment Customers

Flexible Configuration

Customize the system for any number of programs and types of chemicals



Lifetime warranty

In case of a breakdown, we will quickly fix or replace it



Operation in Case of Error

When a system component breaks down, an error alert is generated, while the rest of the system keeps running



Automatic system diagnostics

The system's pressure and current sensors help in identifying issues early on



Independence from Detergent Suppliers

Our custom dosing system allows us to negotiate much more favorable terms with chemical suppliers



Tracking of chemical consumption

Oversupply or underdosing control for detergent




Data collection

The ability to view system performance data for any period



Control from any device

Manage and monitor from your phone, tablet, or computer

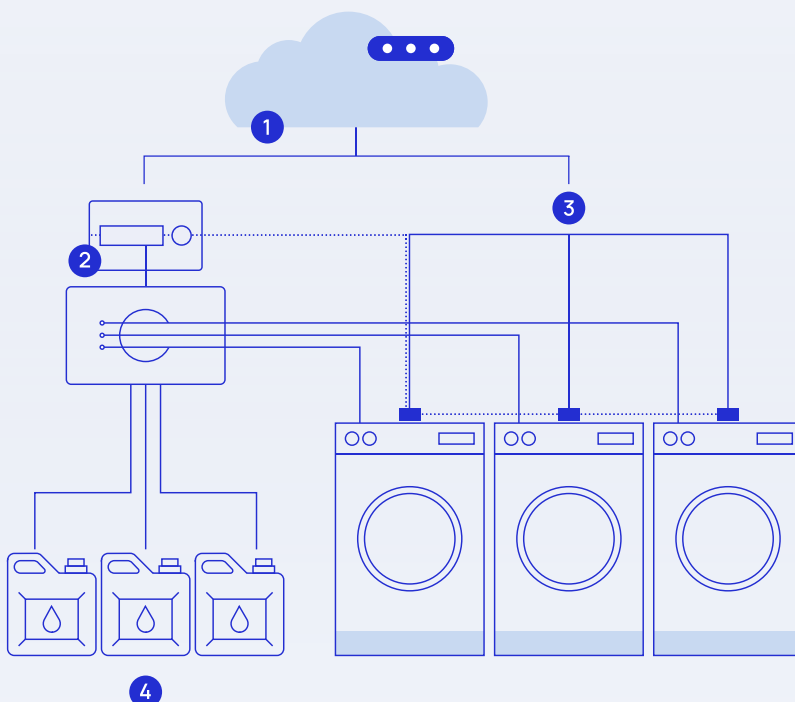

- 1 Cloud-based management software** – manages the supply of liquid detergents to any machine based on the chosen wash program (optional system component)
- 2 The main module** – doses detergents according to the commands received from the management software
- 3 External module** – a device that transmits machine signals to the management software
- 4 Liquid detergent canisters**

Kickstart your vending laundry with LamaLux equipment

Offering booking and payment through mobile app

Optimize the cost of laundry and drying

With the booking system, machine utilization increases, demand is leveled, and the cost of service is reduced

Increase the revenue of vending laundry

Our push notification and rewards system encourages customers to develop the habit of using the service regularly

Attract more customers

Can access laundry without queues and have more flexibility in own time planning

Enjoy clear and transparent business processes

With our comprehensive reporting and dashboard tools

Integrating booking system to vending laundries boosts revenue by 10-30%



Download the application



Contacts

info@lamalux.com
lamalux.com



For more information
visit our website

